


Audio Hijack for use with Broadcastify



Chose Internet Radio

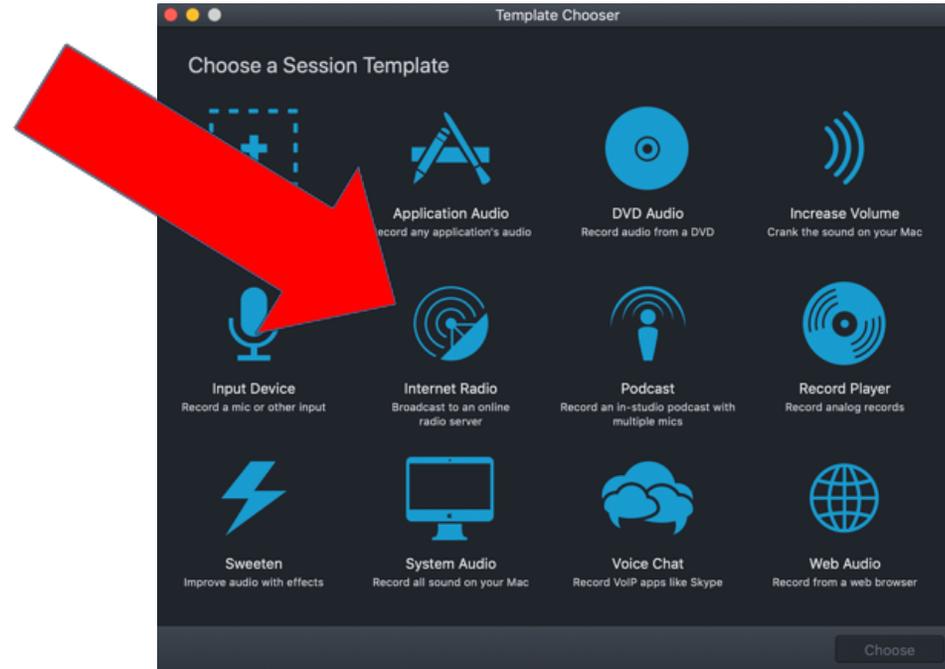

Delete these circled blocks



Drag a volume block into place from the built in effects menu from the right tools column



Double click the Broadcast block

Ignore the status and metadata tabs



Click the setup tab

Server type: Icecast 2

You can find your server address, port #, password and mount in the technical tab of your broadcastify account

Leave username blank

Copy the encoding format exactly as shown

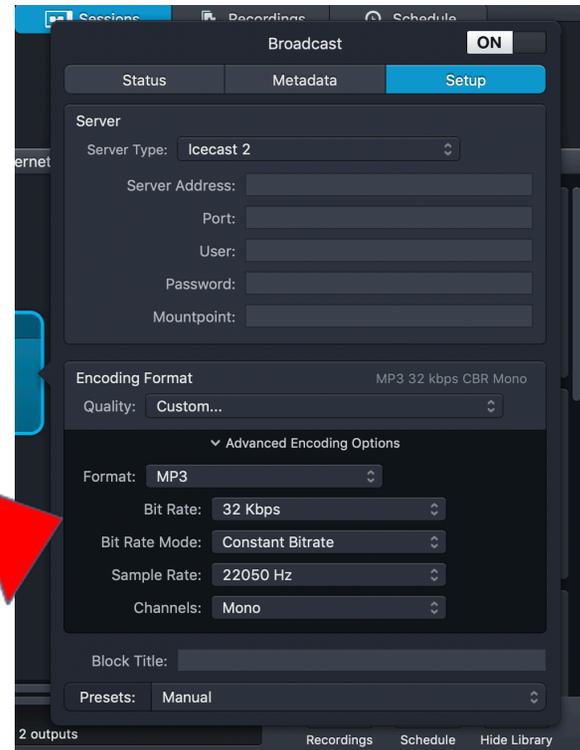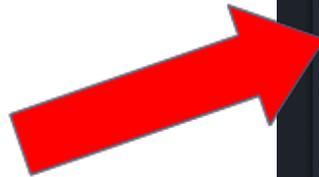

Click the record circle in the bottom left

Success will look like this.

You can broadcast multiple feeds
By just repeating the steps and adding
Many blocks as you need within the
Same session window.

Audio hijack controls the internal MacOS
Sound settings also.

For my feeds, I use the built in line in and
I purchased a small plug and play
USB sound card for \$7 off amazon.

I leave the scanner volumes all the way up
And set the block volumes to 50.

My feeds are very clean with no squelch.

